01865 767676
sales@unicol.com
www.unicol.com

TL1 - PZX

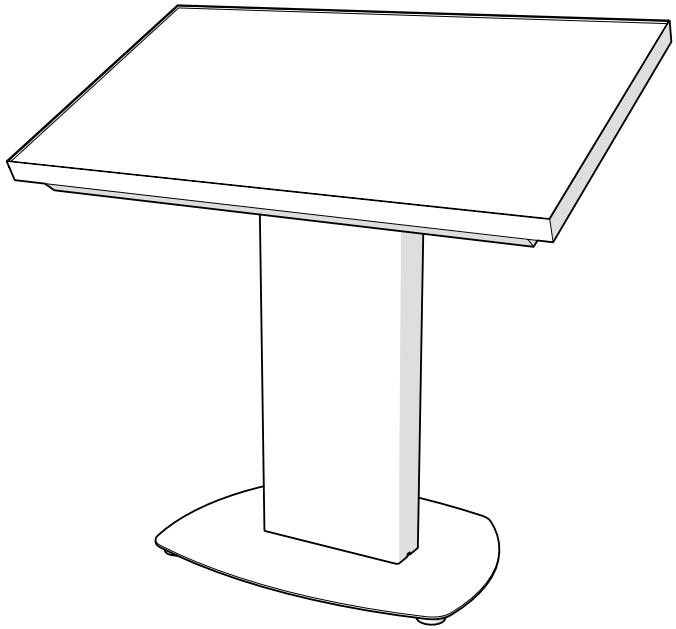

Screen Size: 33 - 70" | **Guide Max. Weight:** 80kg
Please check model specific details before installing

Revised 13/08/24

WARNING

Please carefully inspect the product before assembling. If you notice any apparent damage, call your carrier claims agent and do not continue the installation until it has been reviewed. Please watch for pinch points. Do not put your fingers between moveable parts. Do not tamper with or disassemble any spring loaded parts. Before installing, make sure that the supporting surface will support five times the combined load of the solution and the hardware. Never exceed the maximum load capacity. Please also layout all components to ensure that you have all of the required parts before proceeding (see BOM list on following page). Use of this product for anything other than its specified use may result in failure or personal injury. This product is intended for indoor use only. We recommend using a qualified trades person for installation. Use an assistant or lifting equipment to lift and position products.

For support, please call: +44 (0)1865 767676 or email: sales@unicol.com

01865 767676
sales@unicol.com
www.unicol.com

#	TOOLS REQUIRED
1	*4mm & 5mm Allen Keys*
2	*Pozi Head Screwdriver*
3	*17mm Spanner*

INSTALLERS REQUIRED
1-2

COMPONENTS

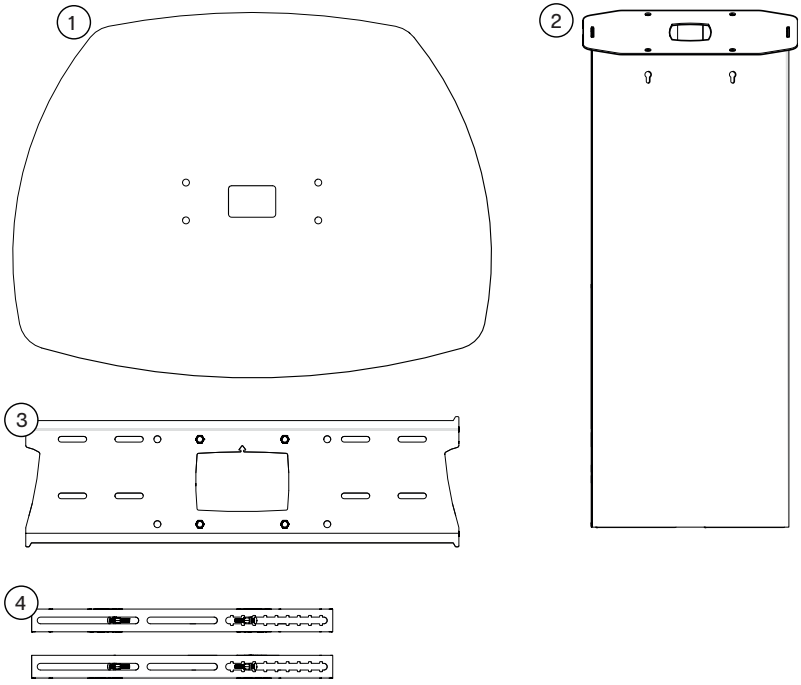

#	DESCRIPTION	QTY
1	Base	1
2	Mast Unit	1
3	Screen Mount Backplate	1
4	Screen Mount Arms	2

Revised 13/08/24

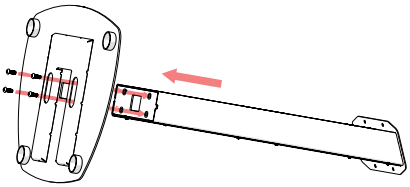

STEP 1

Identify base and mast. The base is heavy so you might want another person to support it. Allow the floor to take the weight of the base and mast and position them in order to fix together using the 4 x M10 x 25 allen screws supplied.



STEP 2

Stand the assembly upright and remove rear cover by loosening the 6 x M6 allen screws sufficiently in order to lift the rear cover and pull towards you. Put cover to one side.



STEP 3

Place the mount backplate over the top of the mast and fix in position using the 4 x M10 X 25 hex head bolts.



STEP 4

While the stand is relatively light, without screen, now is a good time to roughly position it and run the cables up from beneath the base. There is room for AV devices within the mast and an aperture in the mount to feed cables through to the screen.

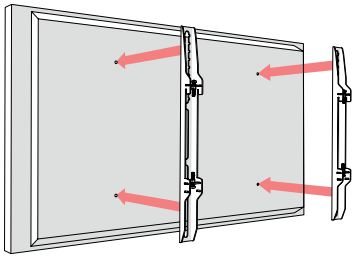

STEP 5

Utilising the tag locks and fixing pack provided with your mount, attach the arms to the back of your screen.

Ensure the arms are the correct way up before tightening - the 'hook' part of the arm should be at the top.

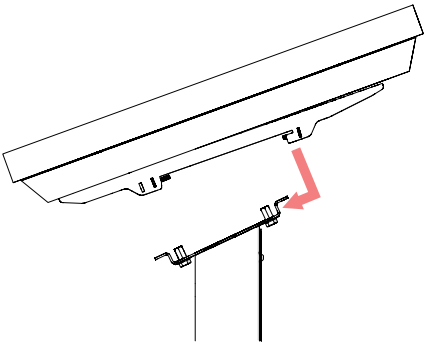

STEP 6

Using another team member, lift the screen up and gradually offer it up to the back plate. Gently tilting the screen forward, hook the arms over the lip of the back plate and lower once in position.

Centre the screen horizontally by sliding from side to side until you are happy with the position. Cable up.

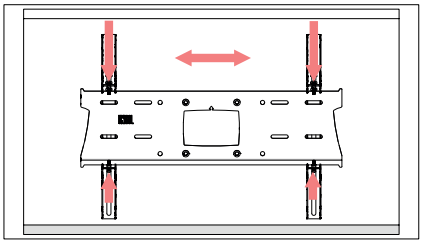

STEP 7

Once centered, ensure the bottom screws are not screwed tight and screw down the top screws to level the screen. Once level tighten bottom screws to secure the mount.

Note that you won't be able to adjust the screens position after the screws have been tightened.

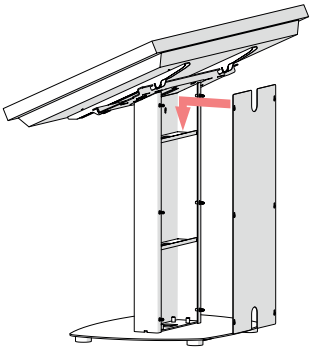

STEP 8

Refit rear cover in the reverse fashion as Step 2.

Test the unit to complete installation.